

General Description

Laid scrim is a cost-effective reinforcing fabric made by chemically bonding continuous filament yarn in an open mesh construction. It is commonly used to increase tear or puncture resistance, improve dimensional stability, or aid in processing. The utility of scrims can be further enhanced by the use of functional binders for increased chemical, heat or moisture resistance, for proper chemical compatibility with the construction they are reinforcing, or for providing the adhesive properties needed for laminations.

Technical characteristics


Property	Imperial	Metric
MD Yarn:	500 Denier H.T. Polyester	550 Dtex H.T. Polyester
CD Yarn:	500 Denier H.T. Polyester	550 Dtex H.T. Polyester
Pattern:	5 x 5 yarns/inch	2 x 2 yarns/cm
Tensile:	50 x 45 lbs/inch	445 x 400 N/5cm
Weight:	2.13 oz/yd ²	72 g/m ²
Coating:	F.R. PVC	F.R. PVC
Substrate:	1 layer of 0.5 oz/yd ² Spunbond Polyester	1 layer of 17 g/m ² Spunbond Polyester

All statements herein are expressions of opinion, which we believe to be accurate and reliable, but are presented without guarantee or responsibility on our part. Statements concerning possible use of our product are not intended as recommendations for their use in the infringement of any patent. No patent warranty of any kind, expressed or implied, is made or intended. Values presented above are nominal and only to be used as guidelines.

Technical Data Sheet

Properties

- Excellent dimensional stability
- Tensile strength
- Increased tear resistance

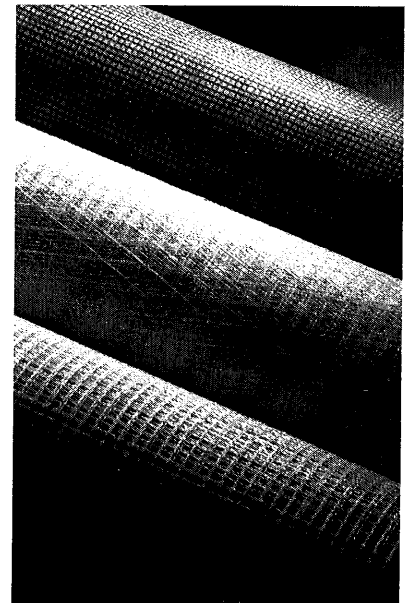

Edited by:
SAINT-GOBAIN ADFORS America

SAINT-GOBAIN ADFORS America
1795 Baseline Road
Grand Island, NY 14072
USA
Tel: 716-775-3900
Fax: 716-775-3901

SAINT-GOBAIN ADFORS America
reserves the right to change the
information given herein without prior
notice

Technical Data Sheet

Last update: 10/28/11